

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/008317 A1

- (51) International Patent Classification⁷: **G02C 5/22**
- (21) International Application Number:
PCT/IB2004/002336
- (22) International Filing Date: 21 July 2004 (21.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BL2003A000011 22 July 2003 (22.07.2003) IT
- (71) Applicant (for all designated States except US): **MILAN DI KCAVENDA MILENKO** [IT/IT]; Via XX Settembre, 9, I-32044 Pieve Di Cadore (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KCAVENDA, Milan** [BA/IT]; Via XX Settembre, 9, I-32044 Pieve Di Cadore (IT).
- (74) Agent: **PETRAZ, Gilberto**; GLP Srl, Piazzale Cavedalis, 6/2, I-33100 Udine (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **RECESSED HINGE TO MAKE THE TEMPLES OF SPECTACLES ELASTIC**

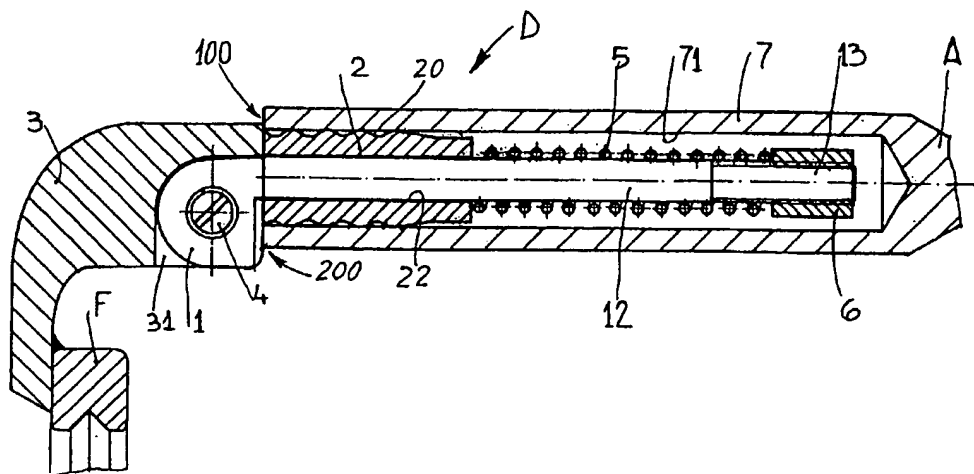

(57) Abstract: Recessed hinge (D, D¹, D², D³, D⁴) to make a temple (A, A¹, A², A³, A⁴) elastic with respect to a respective endpiece (3, 3¹, 3², 3³, 3⁴) of a frame (F) of a pair of spectacles. The hinge (D, D¹, D², D³, D⁴) comprises at least a male hinging element (100, 100¹, 100², 100³, 100⁴) pivoted to at least a corresponding female element (200, 200¹, 200², 200³, 200⁴). The male hinging element (100, 100¹, 100², 100³, 100⁴) comprises at least a tie-rod (12, 12¹, 12², 12³, 12⁴) able to slide with respect to the temple (A, A¹, A², A³, A⁴), a bushing (2, 2¹, 2², 2³, 2⁴, 73) arranged inside the temple (A, A¹, A², A³, A⁴) and axially associated with the tie-rod (12, 12¹, 12², 12³, 12⁴), and an elastic means (5, 5¹, 5², 5³, 5⁴) loaded between the bushing (2, 2¹, 2², 2³, 2⁴, 73) and an abutment element (6, 6¹, 6², 6³, 6⁴) attached to the tie-rod (12, 12¹, 12², 12³, 12⁴). The female element (200, 200¹, 200², 200³, 200⁴) comprises a seating (30, 30¹, 30², 30³, 30⁴) made in the endpiece (3, 3¹, 3², 3³, 3⁴) by removing material. The male hinging element (100, 100¹, 100², 100³, 100⁴) also comprises a hook element (1, 1¹, 14, 60), solid with the tie-rod (12, 12¹, 12², 12³, 12⁴), housed in the seating (30, 30¹, 30², 30³, 30⁴), which articulates on a pin (4, 4¹, 4², 14) arranged inside the seating (30, 30¹, 30², 30³, 30⁴).